

NOTES:


1. TORQUE RATINGS, Nm :

PART NUMBER	ASYMMETRIC CW TORQUE	ASYMMETRIC CCW TORQUE
QS10-2061-20L	2.0	1.2
QS10-2061-30L	3.0	1.8
QS10-2061-40L	4.0	2.4

2. CYCLE LIFE:
 WITHIN 25,000 CYCLES STATIC TORQUE STAY WITHIN ±20% OF TORQUE SPECIFICATION.

3. FINISH: PLATING

4. 360 DEGREE SHAFT ROTATION

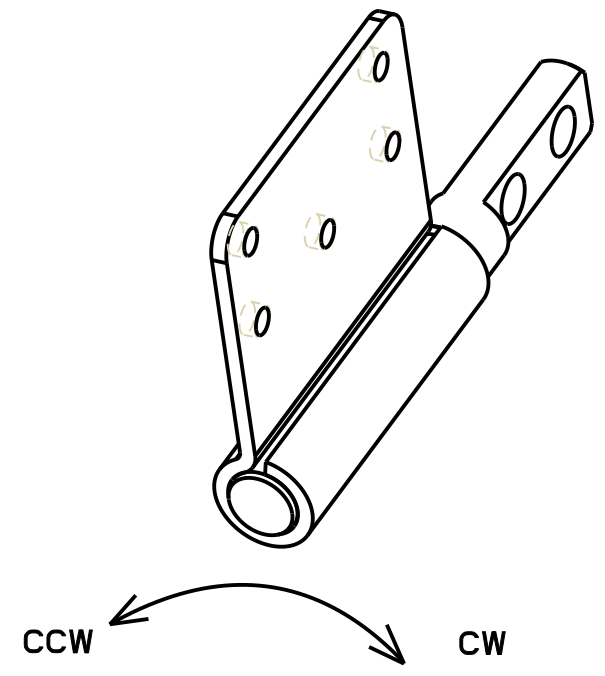

METRIC(MM)	[ENGLISH] (IN)
0-3 ± 0.15	0-0.118 ± 0.006
3-10 ± 0.20	0.118-0.394 ± 0.008
10-30 ± 0.25	0.394-1.181 ± 0.010
30-50 ± 0.30	1.181-2.000 ± 0.012
50-100 ± 0.40	2.000-4.000 ± 0.016
100-200 ± 0.50	4.000-8.000 ± 0.020


PROPRIETY ITEM - ALL INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS PATENT AND OTHERWISE ARE RESERVED BY LEECO TECHNOLOGIES CORPORATION

LEECO

APPROVED	DRAWN
JLIU	BCHEN

SHEET 1 OF 1 SCALE: 1.000

DWG NO.	QS10-2061-xxL		
TITLE	QS10 LEFT		
MATERIAL	STEEL		
REV	A3	☉	◻

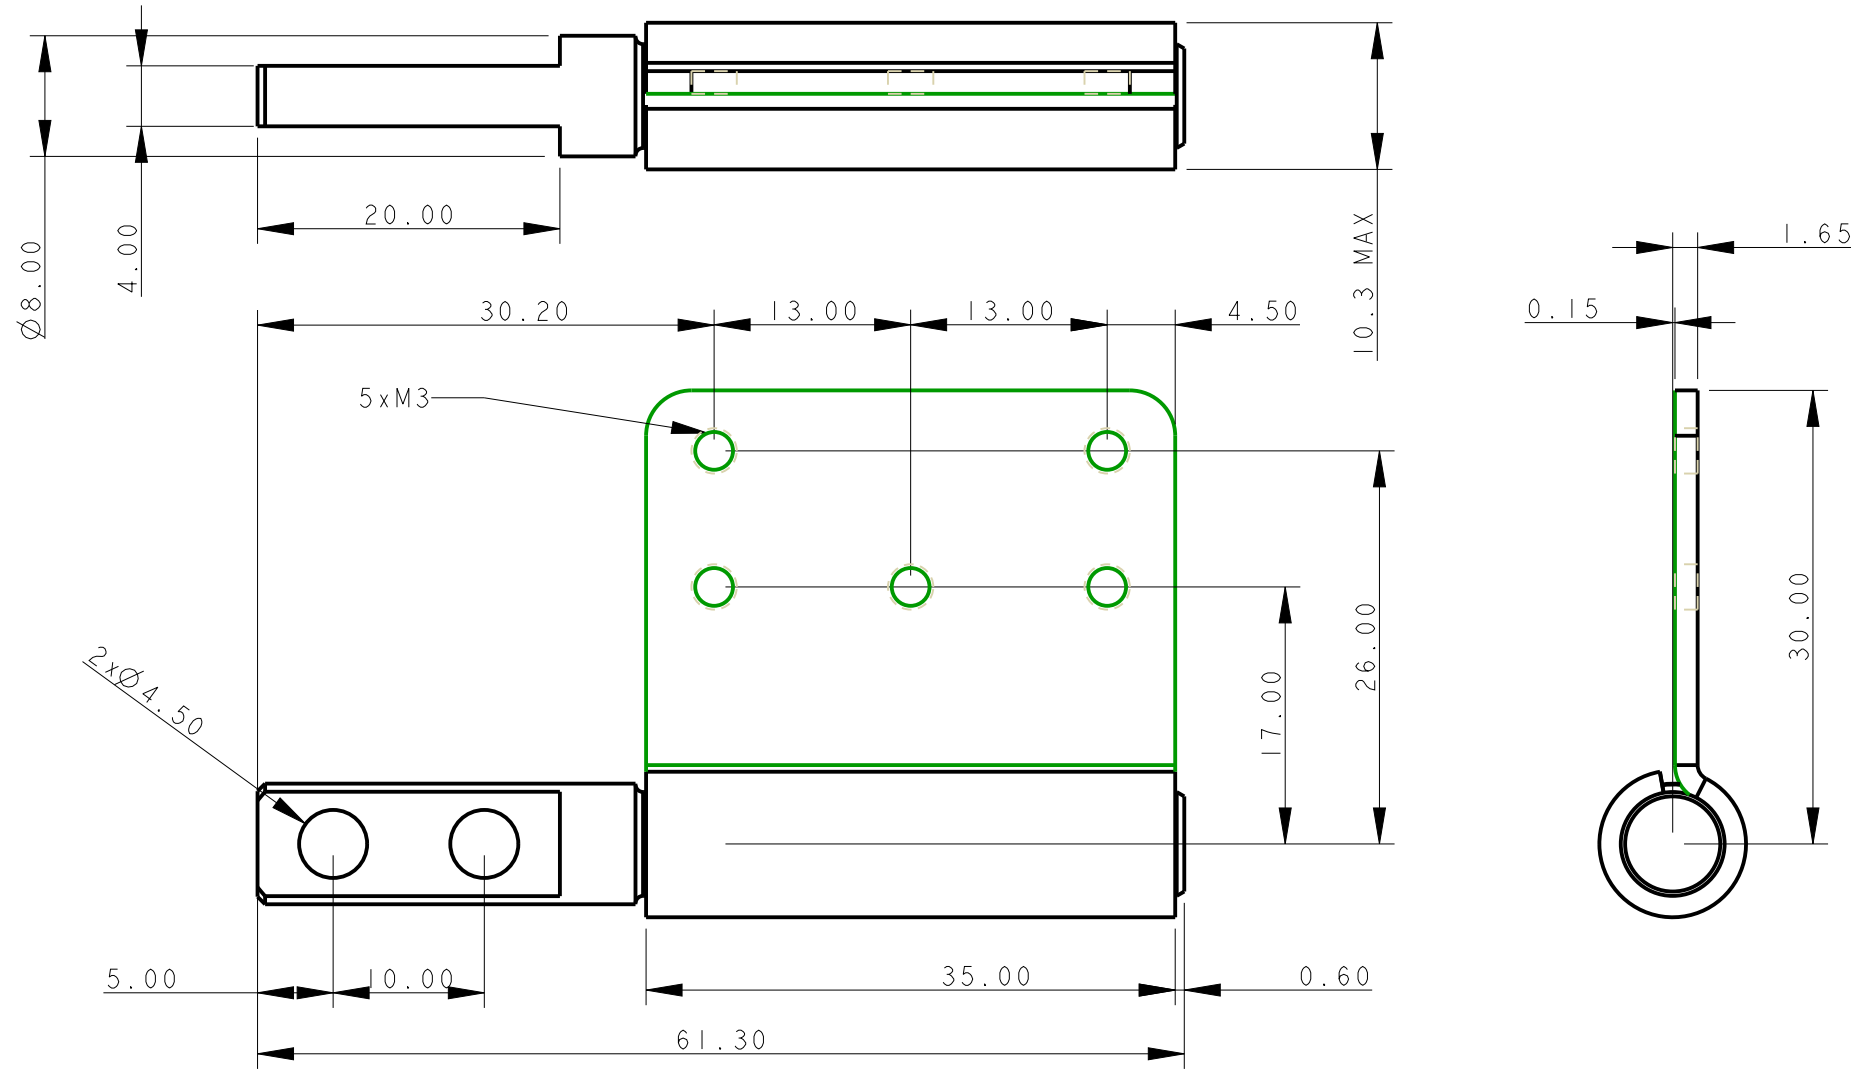

NOTES:


1. TORQUE RATINGS, Nm :

PART NUMBER	ASYMMETRIC CW TORQUE	ASYMMETRIC CCW TORQUE
QS10-2061-20R	1.2	2.0
QS10-2061-30R	1.8	3.0
QS10-2061-40R	2.4	4.0

2. CYCLE LIFE:
WITHIN 25,000 CYCLES STATIC TORQUE STAY WITHIN $\pm 20\%$ OF TORQUE SPECIFICATION.

3. FINISH: PLATING

4. 360 DEGREE SHAFT ROTATION

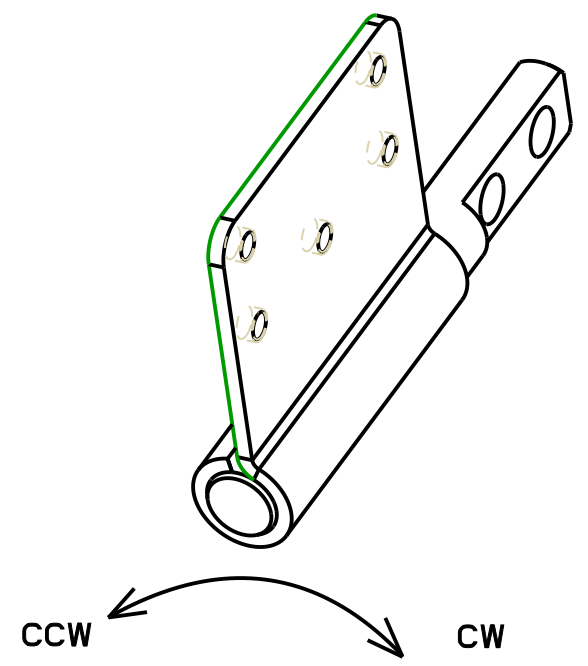

METRIC(MM)	[ENGLISH] (IN)	LEEEO		DWG NO.		
0-3 ± 0.15	0-0.118 ± 0.006			QS10-2061-xxR		
3-10 ± 0.20	0.118-0.394 ± 0.008	TITLE				
10-30 ± 0.25	0.394-1.181 ± 0.010	QS10 RIGHT				
30-50 ± 0.30	1.181-2.000 ± 0.012	APPROVED	DRAWN	MATERIAL		
50-100 ± 0.40	2.000-4.000 ± 0.016	JLIU	BCHEN	STEEL		
100-200 ± 0.50	4.000-8.000 ± 0.020	SHEET 1 OF 1		SCALE: 1.000	REV	
PROPRIETY ITEM - ALL INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS PATENT AND OTHERWISE ARE RESERVED BY LEEEO TECHNOLOGIES CORPORATION				A3		