

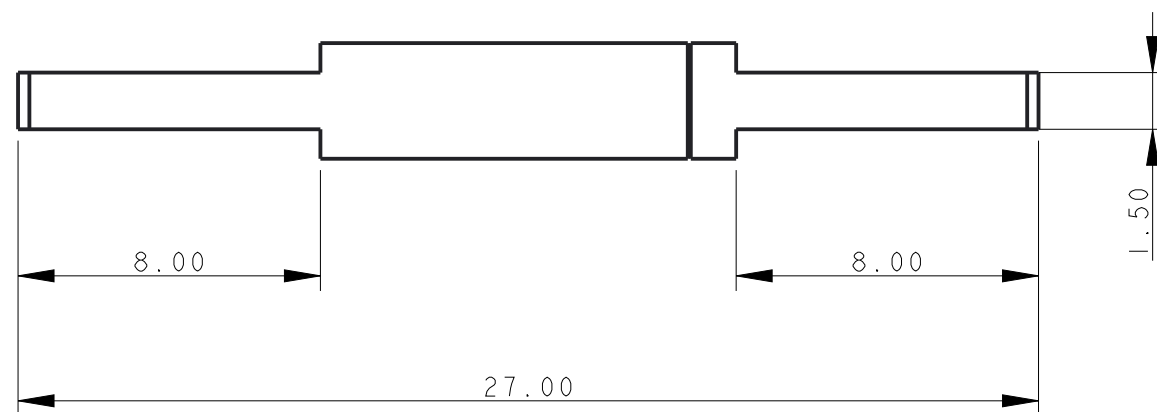



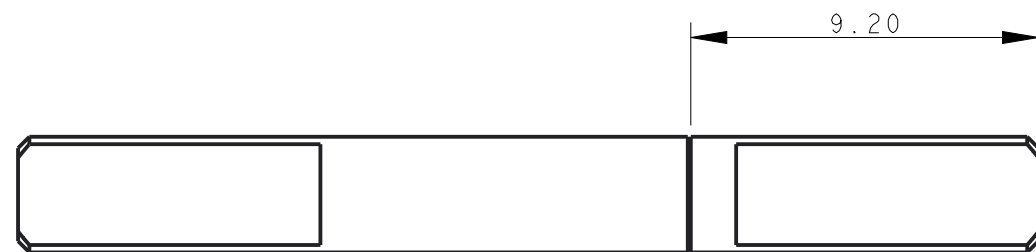


NOTES:

- TORQUE RATINGS, Nm
SYMMETRIC TORQUE: 0.05, CW=CCW
- CYCLE LIFE:
WITHIN 10,000 CYCLES STATIC TORQUE STAY WITHIN
±35% OF TORQUE SPECIFICATION.
- FINISH: PLATING
- 360 DEGREE SHAFT ROTATION

METRIC(MM)		[ENGLISH] (IN)		LEECO			DWG NO.		
							BH3-1003-01		
0-3< ±0.15 3-10< ±0.20 10-30< ±0.25 30-50< ±0.30 50-100< ±0.40 100-200< ±0.50		0-0.118<±0.006 0.118-0.394<±0.008 0.394-1.181<±0.010 1.181-2.000<±0.012 2.000-4.000<±0.016 4.000-8.000<±0.020		APPROVED			DRAWN		
				JLIU			BCHEN		
							MATERIAL		
							STEEL		
							REV		
							A3		
							◎ ▢		

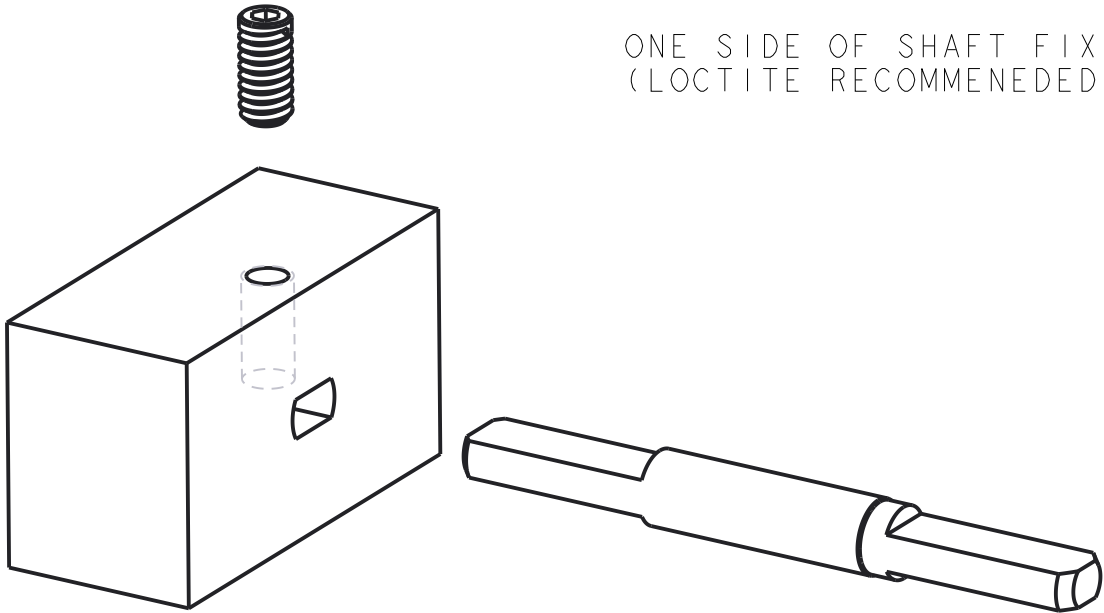

MOUNTING :
ONE SIDE OF SHAFT FIXED BY SCREW
(LOCTITE RECOMMENEDED)

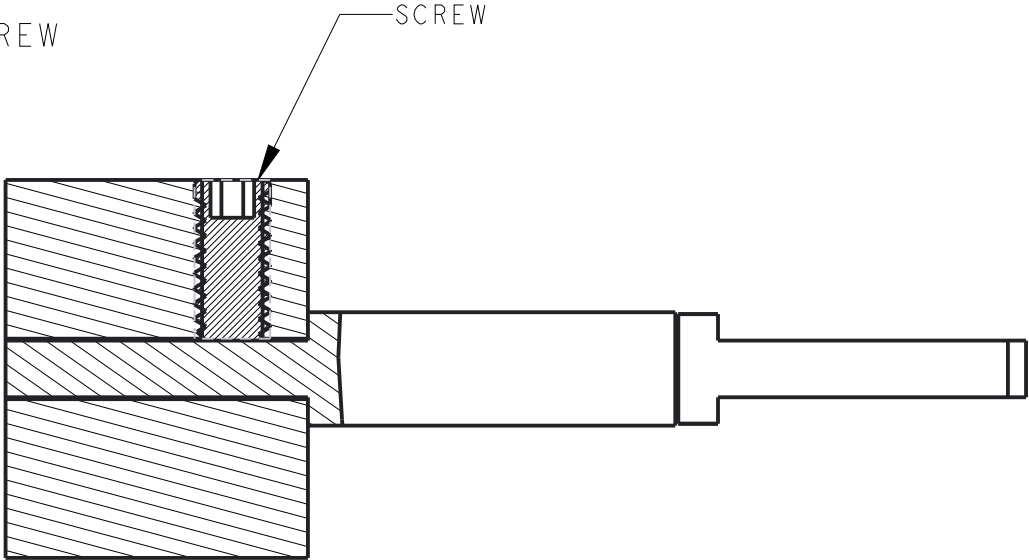

METRIC(MM)		[ENGLISH] (IN)		LEECO			DWG NO.			
0-3< ±0.15 3-10< ±0.20 10-30< ±0.25 30-50< ±0.30 50-100< ±0.40 100-200< ±0.50		0-0.118<±0.006 0.118-0.394<±0.008 0.394-1.181<±0.010 1.181-2.000<±0.012 2.000-4.000<±0.016 4.000-8.000<±0.020					BH3-1003-01			
							TITLE			
				APPROVED	DRAWN		BH3			
				JLIU	BCHEN		MATERIAL			
							STEEL			
PROPRIETY ITEM - ALL INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS PATENT AND OTHERWISE ARE RESERVED BY LEEEO TECHNOLOGIES CORPORATION										
				SHEET 2 OF 2		SCALE: 5.000		REV	A3	