


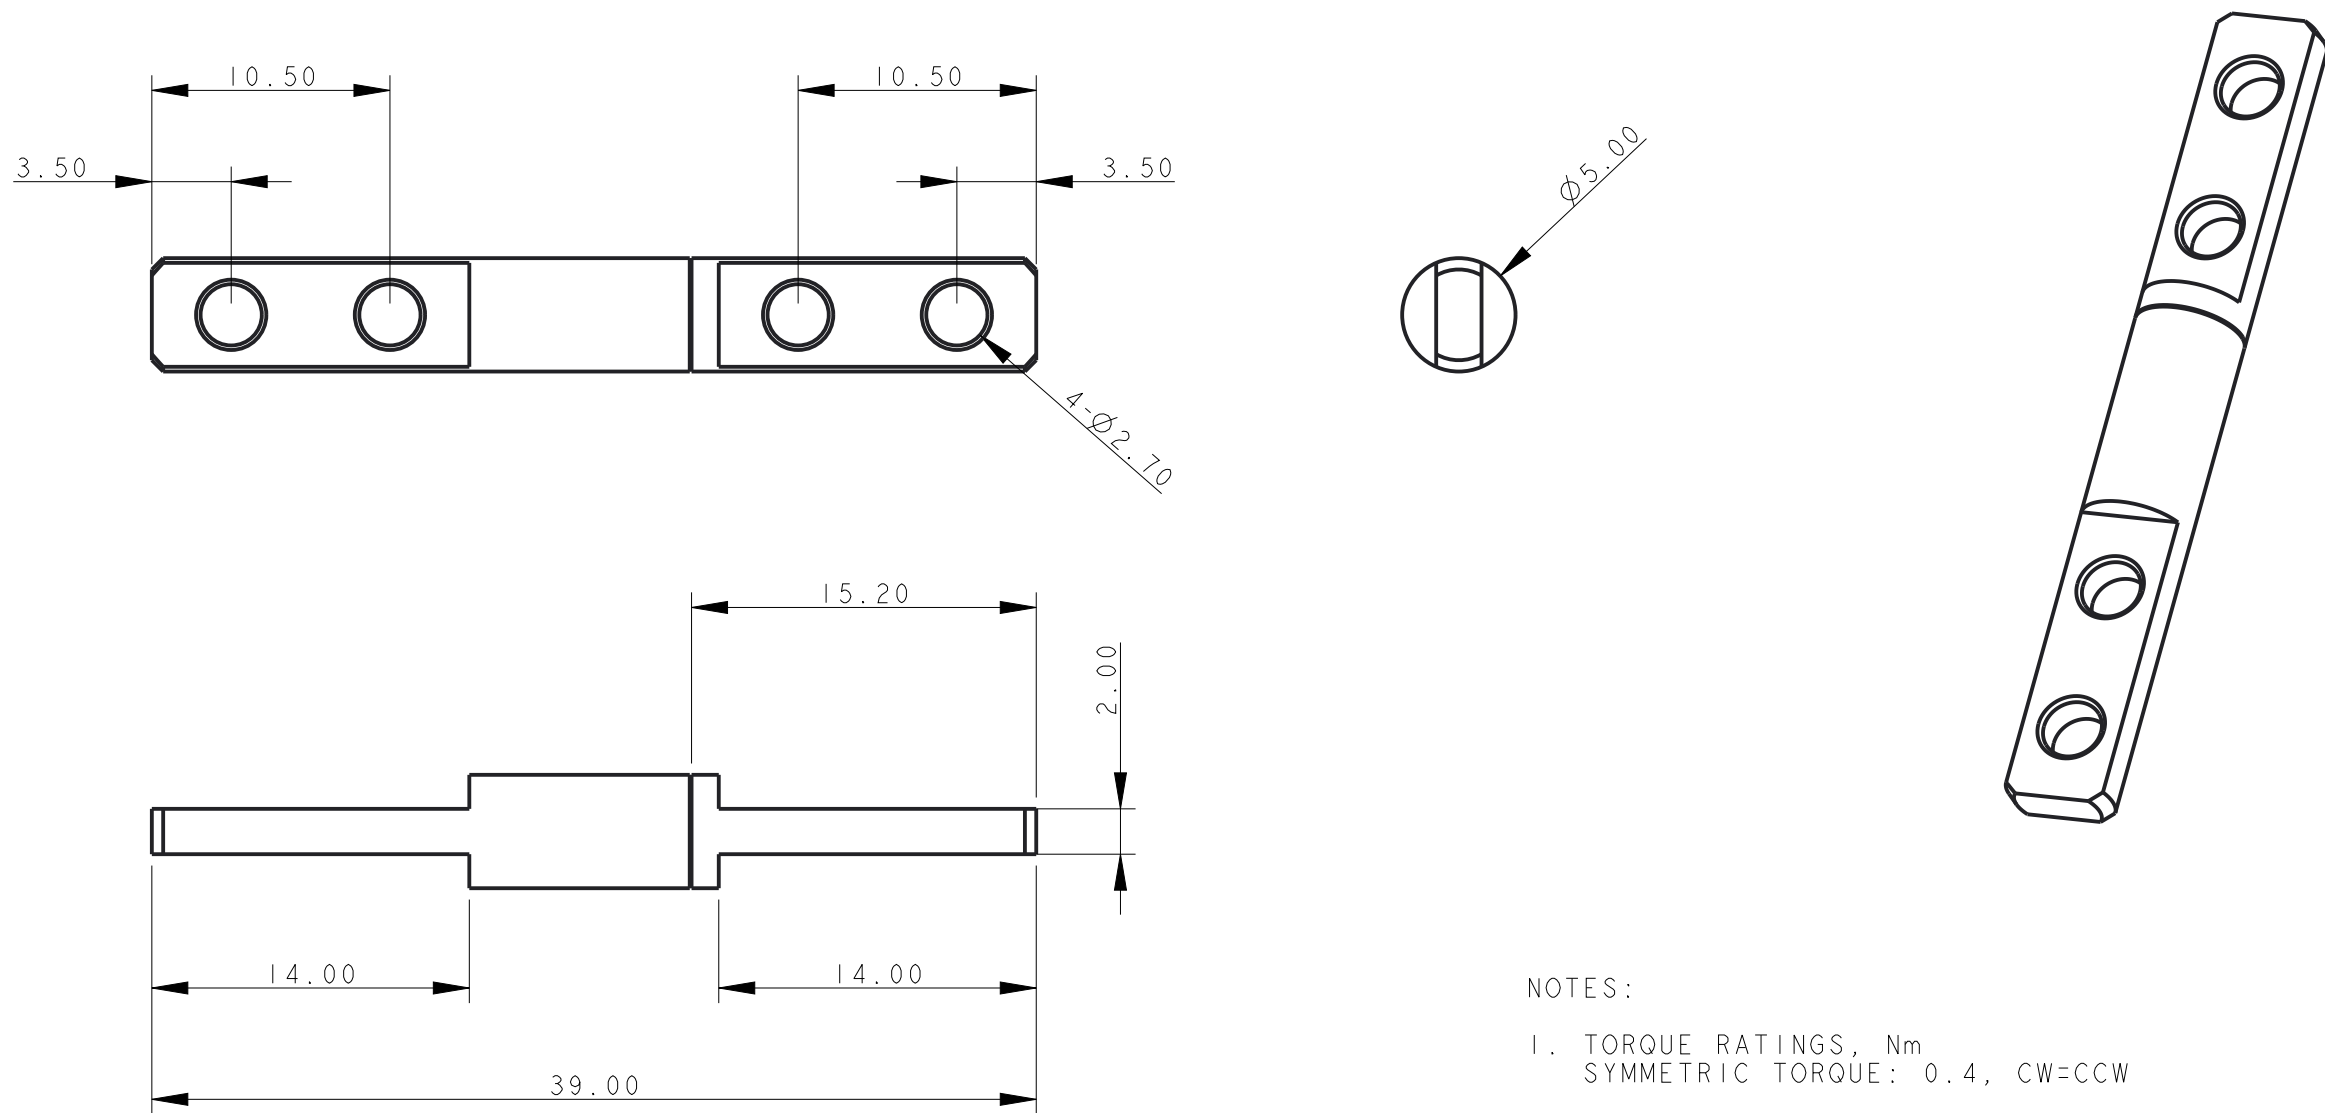

- NOTES:
- 1. TORQUE RATINGS, Nm
SYMMETRIC TORQUE: 0.4, CW=CCW
 - 2. CYCLE LIFE:
WITHIN 10,000 CYCLES STATIC TORQUE STAY WITHIN
±25% OF TORQUE SPECIFICATION.
 - 3. FINISH: PLATING
 - 4. 360 DEGREE SHAFT ROTATION

METRIC(MM)		[ENGLISH] (IN)		LEECO			DWG NO.				
0-3< ±0.15 3-10< ±0.20 10-30< ±0.25 30-50< ±0.30 50-100< ±0.40 100-200< ±0.50		0-0.118<±0.006 0.118-0.394<±0.008 0.394-1.181<±0.010 1.181-2.000<±0.012 2.000-4.000<±0.016 4.000-8.000<±0.020					BH5-1003-04				
							TITLE				
							BH5				
PROPRIETY ITEM - ALL INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS PATENT AND OTHERWISE ARE RESERVED BY LEECO TECHNOLOGIES CORPORATION				APPROVED		DRAWN		MATERIAL			
				JLIU		BCHEN					
				SHEET 1 OF 1		SCALE: 3.000					
						REV		A3			