

NOTES:


1. TORQUE RATINGS, Nm :

PART NUMBER	SYMMETRIC TORQUE
CD20B-1003-25	2.5
CD20B-1003-30	3.0
CD20B-1003-40	4.0
CD20B-1003-50	5.0

2. CYCLE LIFE:
WITHIN 10,000 CYCLES STATIC TORQUE
STAY WITHIN ±25% OF TORQUE SPECIFICATION.

3. FINISH: PLATING

4. 360 DEGREE SHAFT ROTATION

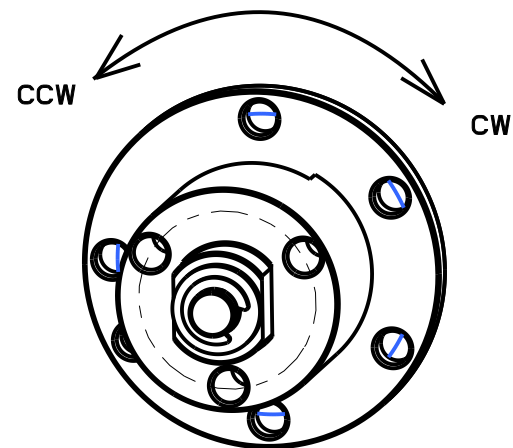

METRIC(MM)	[ENGLISH] (IN)	LEEEO		DWG NO.	
0-3 < ±0.15	0-0.118 < ±0.006			CD20B-1003-xx	
3-10 < ±0.20	0.118-0.394 < ±0.008	TITLE		CD20B	
10-30 < ±0.25	0.394-1.181 < ±0.010	APPROVED	DRAWN	MATERIAL	
30-50 < ±0.30	1.181-2.000 < ±0.012	JLIU	BCHEN	STEEL	
50-100 < ±0.40	2.000-4.000 < ±0.016	SHEET 1 OF 1		REV	A3
100-200 < ±0.50	4.000-8.000 < ±0.020			SCALE: 1.000	
PROPRIETY ITEM - ALL INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS PATENT AND OTHERWISE ARE RESERVED BY LEEEO TECHNOLOGIES CORPORATION					