
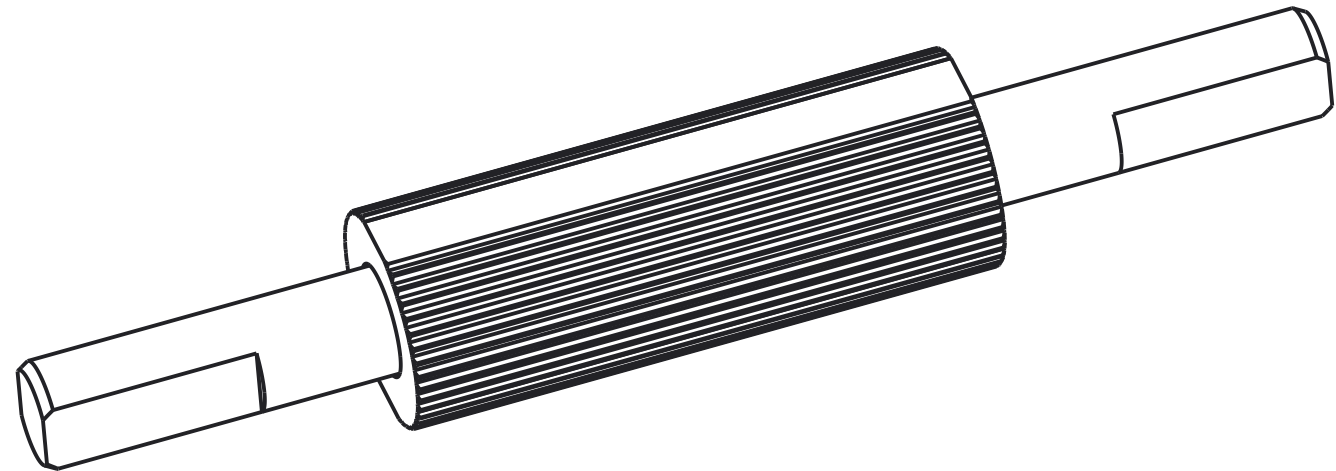


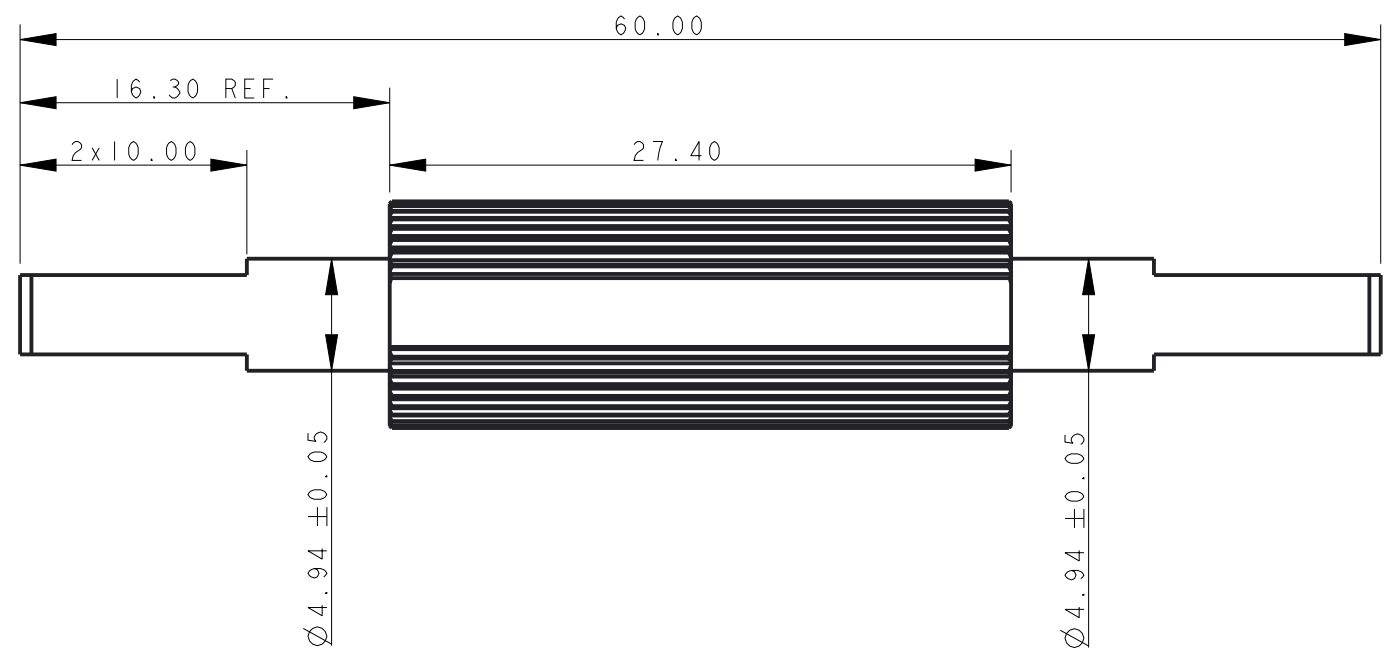

NOTES:

1. TORQUE RATINGS, Nm:

PART NUMBER	SYMMETRIC TORQUE
TIP10-1060-10	1.0
TIP10-1060-20	2.0
TIP10-1060-30	3.0
TIP10-1060-40	4.0
TIP10-1060-50	5.0

2. CYCLE LIFE:
WITHIN 25,000 CYCLES STATIC TORQUE STAY
WITHIN $\pm 20\%$ OF TORQUE SPECIFICATION.
3. FINISH: PLAIN AND PLATING
4. 360 DEGREE SHAFT ROTATION
5. DESIGNED TO BE OVER MOLDED IN GLASS FILLED
ENGINEERING PLASTIC.
6. DO NOT PREHEAT TORQUE INSERT.

METRIC(MM)		[ENGLISH] (IN)		LEECO			DWG NO.					
							TIP10-1060-xx					
0-3< ±0.15 3-10< ±0.20 10-30< ±0.25 30-50< ±0.30 50-100< ±0.40 100-200< ±0.50		0-0.118<±0.006 0.118-0.394<±0.008 0.394-1.181<±0.010 1.181-2.000<±0.012 2.000-4.000<±0.016 4.000-8.000<±0.020		APPROVED			DRAWN					
										TITLE		
				JLIU			DLEE					
PROPRIETY ITEM - ALL INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS PATENT AND OTHERWISE ARE RESERVED BY LEECO TECHNOLOGIES CORPORATION				SHEET 1 OF 1			SCALE: 3.000			MATERIAL		
										STEEL		
							REV		A3			