
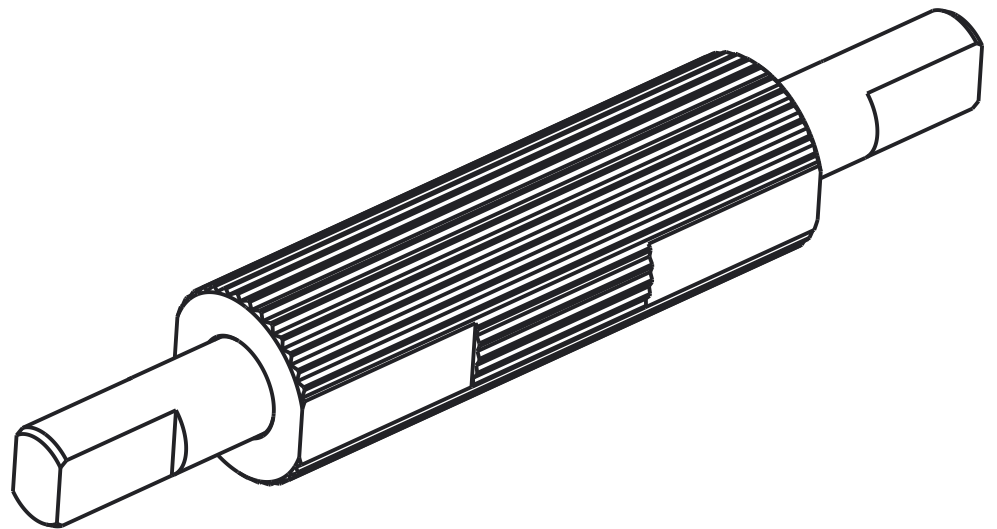


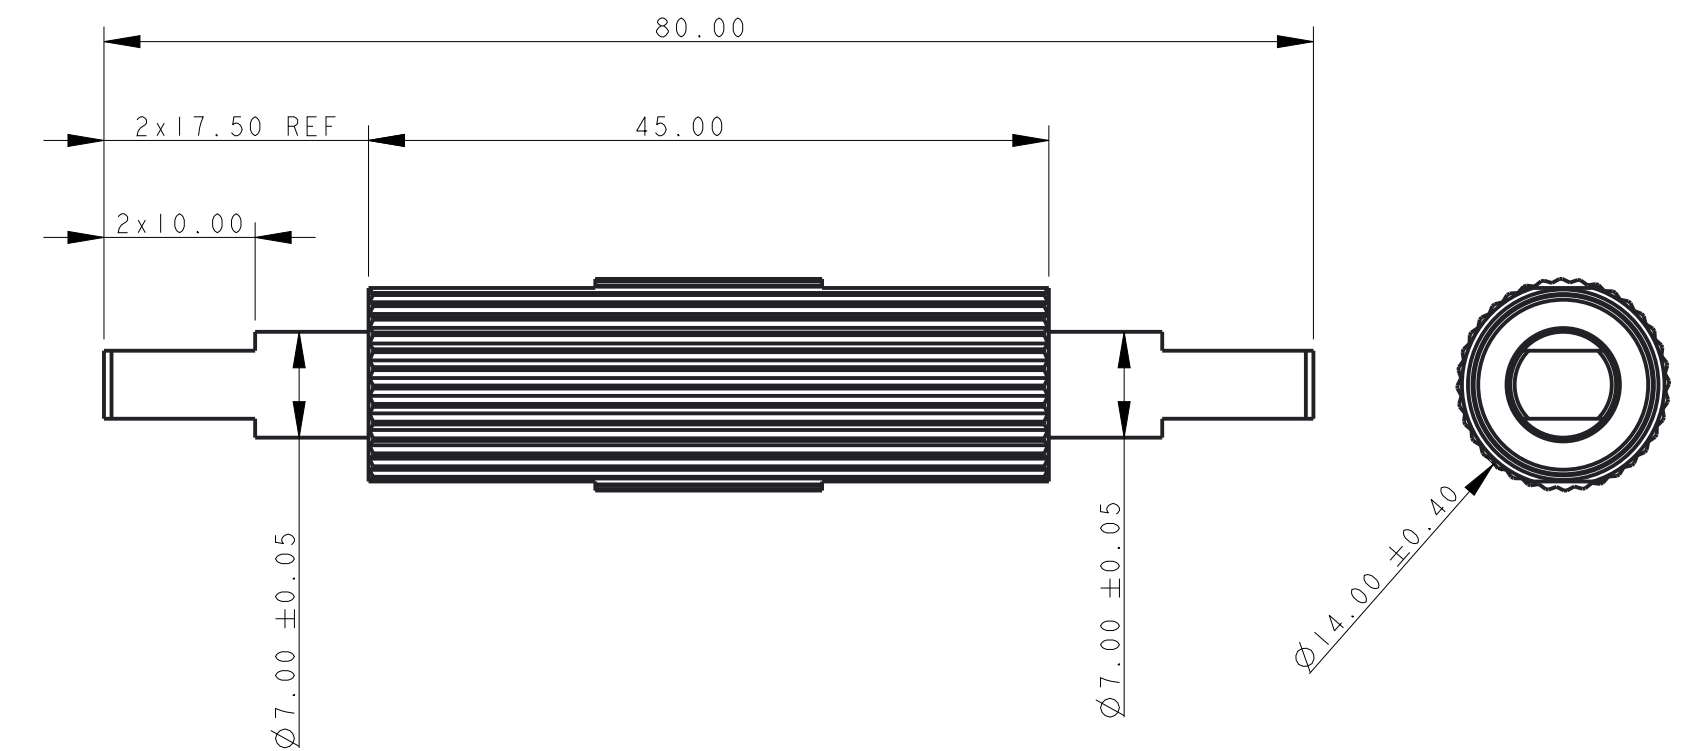

- NOTES:
- TORQUE RATINGS, Nm:

PART NUMBER	SYMMETRIC TORQUE
TIP14-1080-040	4.0
TIP14-1080-080	8.0
TIP14-1080-120	12.0
 - CYCLE LIFE:
WITHIN 25,000 CYCLES STATIC TORQUE STAY WITHIN ±20% OF TORQUE SPECIFICATION.
 - FINISH: PLAIN AND PLATING
 - 360 DEGREE SHAFT ROTATION
 - DESIGNED TO BE OVER MOLDED IN GLASS FILLED ENGINEERING PLASTIC.
 - DO NOT PREHEAT TORQUE INSERT.

METRIC(MM)		[ENGLISH] (IN)		LEEEO			DWG NO.		
0-3< ±0.15 3-10< ±0.20 10-30< ±0.25 30-50< ±0.30 50-100< ±0.40 100-200< ±0.50		0-0.118<±0.006 0.118-0.394<±0.008 0.394-1.181<±0.010 1.181-2.000<±0.012 2.000-4.000<±0.016 4.000-8.000<±0.020					TIP14-1080-xxx		
							TITLE TORQUE INSERT		
APPROVED				DRAWN		MATERIAL STEEL			
				JLIU BCHEN					
PROPRIETY ITEM - ALL INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS PATENT AND OTHERWISE ARE RESERVED BY LEEEO TECHNOLOGIES CORPORATION						REV			
SHEET 1 OF 1				SCALE: 2.000		A3			