


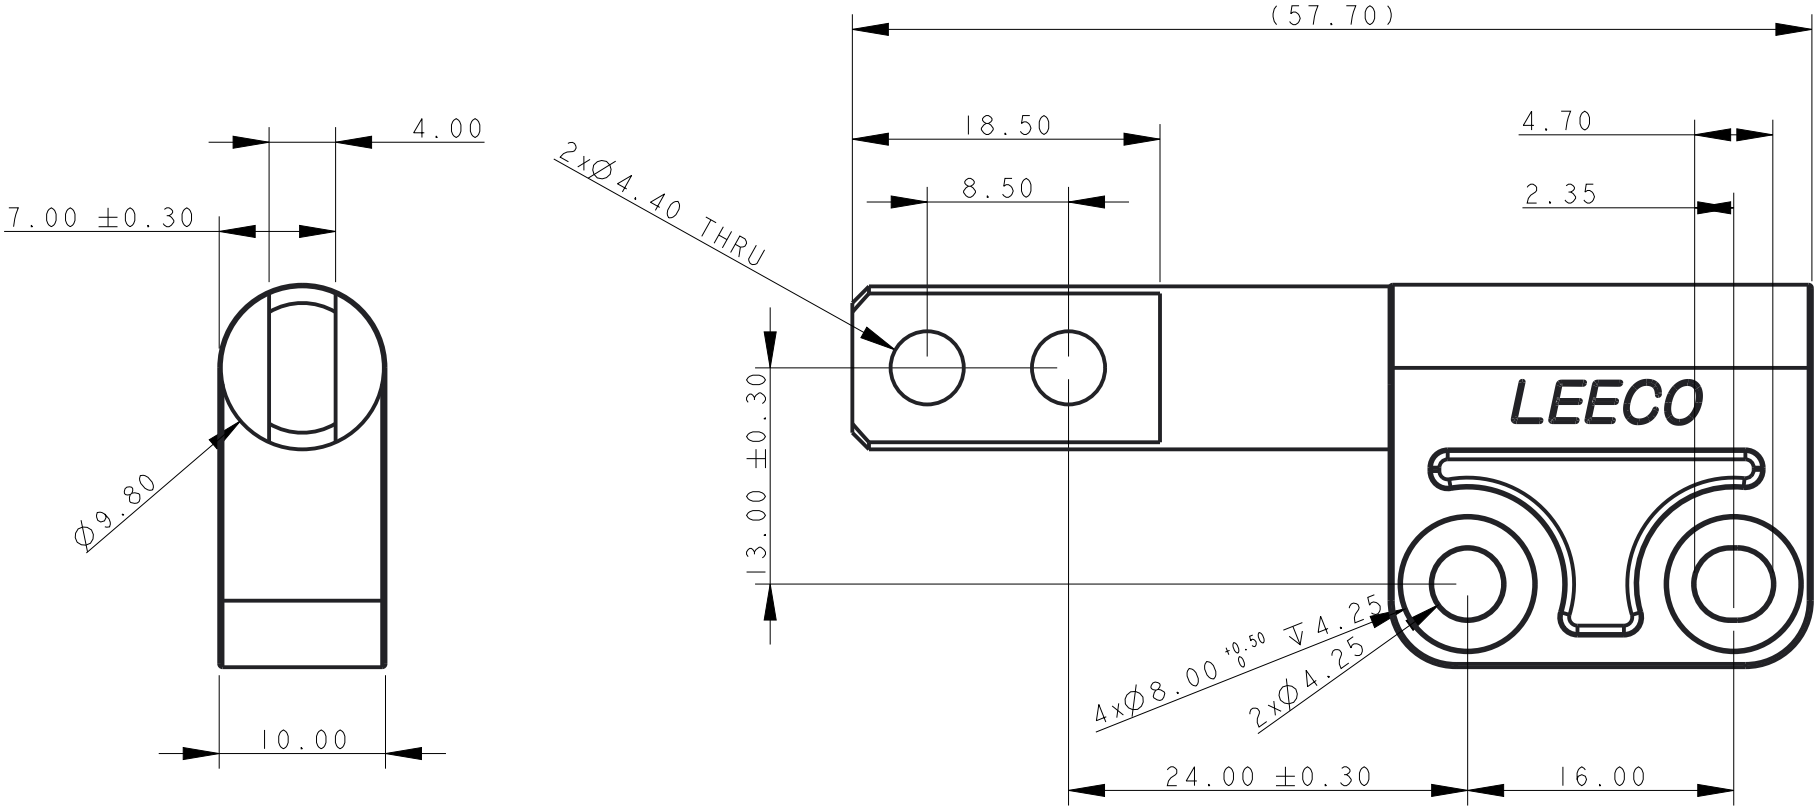

NOTES:

1. TORQUE RATINGS, Nm :

PART NUMBER	SYMMETRIC TORQUE
CT10B-1025-09	0.9
CT10B-1025-14	1.4
CT10B-1025-18	1.8
CT10B-1025-23	2.3
CT10B-1025-27	2.7

PART NUMBER	ASYMMETRIC CW TORQUE	ASYMMETRIC CCW TORQUE
CT10B-2025-14	1.4	0.9
CT10B-2025-18	1.8	1.2
CT10B-2025-23	2.3	1.5
CT10B-2025-27	2.7	1.8
CT10B-2025-34	3.4	2.3
CT10B-3025-14	0.9	1.4
CT10B-3025-18	1.2	1.8
CT10B-3025-23	1.5	2.3
CT10B-3025-27	1.8	2.7
CT10B-3025-34	2.3	3.4

2. CYCLE LIFE:
WITHIN 25,000 CYCLES STATIC TORQUE STAY WITHIN ±20% OF TORQUE SPECIFICATION.
3. FINISH: NATURE
4. 360 DEGREE SHAFT ROTATION

METRIC(MM)		[ENGLISH] (IN)		LEEEO			DWG NO.		
							CT10B-x025-xx		
0-3< ±0.15 3-10< ±0.20 10-30< ±0.25 30-50< ±0.30 50-100< ±0.40 100-200< ±0.50		0-0.118<±0.006 0.118-0.394<±0.008 0.394-1.181<±0.010 1.181-2.000<±0.012 2.000-4.000<±0.016 4.000-8.000<±0.020		APPROVED			DRAWN		
		JLIU		BCHEN			TITLE		
PROPRIETY ITEM - ALL INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS PATENT AND OTHERWISE ARE RESERVED BY LEEEO TECHNOLOGIES CORPORATION							MATERIAL		
		SHEET 1 OF 1			SCALE: 2.200			REV	
								A3	
									